ROOF TRUSS UPLIFT ANCHOR SCHEDULE

SIMPSON ANCHORS	ROOF TRUSS UPLIFT LOAD	REMARKS
H2.5A	LOADS LESS THAN 455#	
H7 OR H10	LOADS LESS THAN 905#	WHERE STUD ALIGNS WITH TRUSS
MTS12 *	LOADS LESS THAN 1000#	OR GREATER SIZE AS REQ'D FOR INSTALLATION
H15	LOADS LESS THAN 1300#	(12) 10d TO STUD
MTT28B	LOADS LESS THAN 4455# (2 PLY) LOADS LESS THAN 3465# (1 PLY)	(24) 16d NAILS (24) 10d NAILS (TWO REQ'D)
THA218-2 **	LOADS LESS THAN 1550#	TWO PLY TRUSS
LTT20B	LOADS LESS THAN 1750#	TWO PLY TRUSS (10) 16d NAILS (TWO REQ'D)
(2) HD8A OR (4) HD5A	6465#	TWO PLY TRUSS
(2) HD5A	3705#	ONE PLY TRUSS

NOTES:


*** INSTALL SIMPSON MTS12 NEAREST ADJACENT STUD TO TOP PLATE.**
**** INSTALL SIMPSON MTS12 AT TWO NEAREST ADJACENT STUDS TO TOP PLATE. INSTALL ALL ANCHORS IN STRICT ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS AND INSTRUCTIONS.**

12 ROOF TRUSS UPLIFT ANCHOR SCHEDULE
SCALE: 3/4" = 1'-0"


NAILING SCHEDULE

CONNECTIONS	NAILING
1. JOIST TO SILL OR GIRDER, TOENAIL	(3) 8d
2. BRIDGING TO JOIST, TOENAIL EA. END	(2) 8d
3. 1"x6" SUBFLOOR OR LESS TO EA. JOIST, FACE NAIL	(2) 8d
4. WIDER THAN 1"x6" SUBFLOOR TO EA. JOIST FACE NAIL	(3) 8d
5. 2" SUBFLOOR TO JOIST OR GIRDER, BLIND AND FACE NAIL	(2) 16d
6. SOLE PLATE TO JOIST OR BLOCKING, FACE NAIL SOLE PLATE TO JOIST OR BLOCKING, AT BRACED WALL PANELS	16d @ 16"OC (3) 16d PER 16"
7. TOP PLATE TO STUD, END NAIL	(2) 16d
8. STUD TO SOLE PLATE	(4) 8d, TOENAIL OR (2)16d, END NAIL
9. DOUBLE STUDS, FACE NAIL	16d @ 24" OC
10. DOUBLE TOP PLATES, FACE NAIL DOUBLE TOP PLATES, LAP SPLICE	16d @ 16" OC (8) 16d
11. BLOCKING BETWEEN JOISTS OR RAFTERS TO TOP PLATE, TOENAIL	(3) 8d
12. RIM JOIST TO TOP PLATE, TOENAIL	8d @ 6" OC
13. TOP PLATES, LAPS AND INTERSECTIONS, FACE NAIL	(2) 16d
14. CONTINUOUS HEADER, TWO PIECES	16d @ 16" OC ALONG EA. EDGE
15. CEILING JOIST TO PLATE, TOENAIL	(3) 8d
16. CONTINUOUS HEADER TO STUD, TOENAIL	(4) 8d
17. CEILING JOIST, LAPS OVER PARTITIONS, FACE NAIL	(3) 16d
18. CEILING JOIST TO PARALLEL RAFTERS, FACE NAIL	(3) 16d
19. RAFTER TO PLATE, TOENAIL	(3) 8d
20. 1" BRACE TO EA. STUD AND PLATE, FACE NAIL	(2) 8d
21. 1"x8" SHEATHING OR LESS TO EA. BEARING, FACE NAIL	(2) 8d
22. WIDER THAN 1"x8" SHEATHING TO EA. BEARING, FACE NAIL	(2) 8d
23. BUILT-UP CORNER STUDS	16d @ 24" OC
24. BUILT-UP GIRDER AND BEAMS	20d @ 32"OC AT TOP AND BOTTOM AND STAGGERED (2) 20d @ EA. ENDS AND AT EA SPLICE
25. TRUSS TO PLATE, TOENAIL	(3) 16d


11 NAILING SCHEDULE
SCALE: 3/4" = 1'-0"

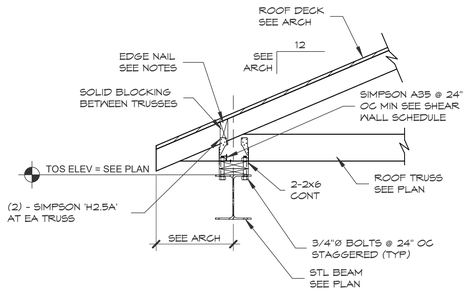

9 DETAIL AT DRIVE THRU
SCALE: 3/4" = 1'-0"




6 ROOF TRUSS PROFILE RT-2
SCALE: 3/16" = 1'-0"

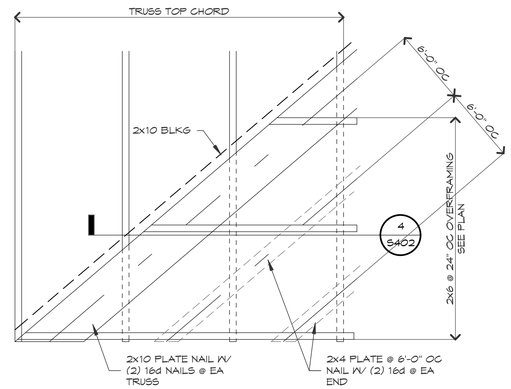


3 PLAN AT OVERFRAMING
SCALE: 3/4" = 1'-0"

8 DETAIL AT BEAM
SCALE: 3/4" = 1'-0"

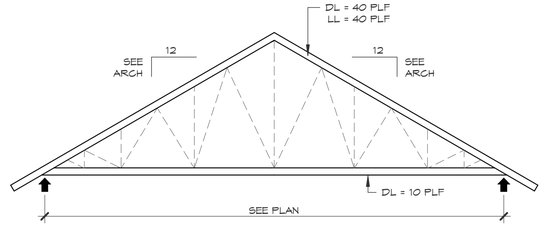

5 ROOF TRUSS PROFILE RT-1
SCALE: 3/16" = 1'-0"

2 HEADER DETAIL
SCALE: 3/4" = 1'-0"



10 DETAIL
SCALE: 3/4" = 1'-0"


JOIST(BEAM OR TRUSS) HANGER SCHEDULE

2x6	LUS26
2x8	LUS26
2x10	LUS28
2x12	LUS210
(2) 2x6	HUS26-2TF
(2) 2x8	HUS28-2TF
(2) 2x10	HUS210-2TF
(2) 2x12	HUS210-2TF
(3) 2x10	HUS210-2TF
(3) 2x12	HU212-3TF
3 1/2 x 9 1/4 PARALLAM	HW 149.25
5 1/4 x 9 1/4 PARALLAM	WP 5.31/9.25
5 1/4 x 12 PARALLAM	HWU 5.50/12
TRUSS TO TRUSS	AS SPECIFIED BY TRUSS ENGINEER


NOTES:

1. **SEE TIMBER GENERAL NOTES NO. XX**
2. **PROVIDE HANGERS AT ALL LOCATIONS WHERE MEMBERS FRAME TOGETHER AT THE SAME ELEVATION (U.N.O.).**
3. **WHERE WOOD BEAMS FRAME INTO STEEL COLUMNS, PROVIDE 1/4" PLATE SADDLE WITH BEARING PLATE WELDED TO COLUMN.**
4. **PROVIDE SLOPED HANGERS WHERE REQUIRED.**

7 HANGER SCHEDULE
SCALE: 3/4" = 1'-0"

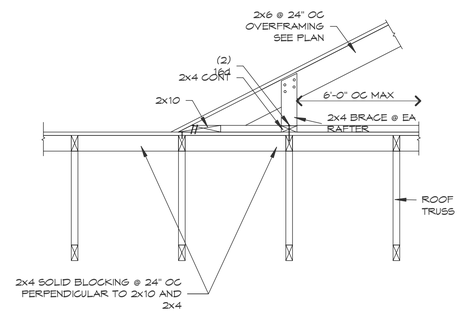

4 SECTION AT OVERFRAMING
SCALE: 3/4" = 1'-0"

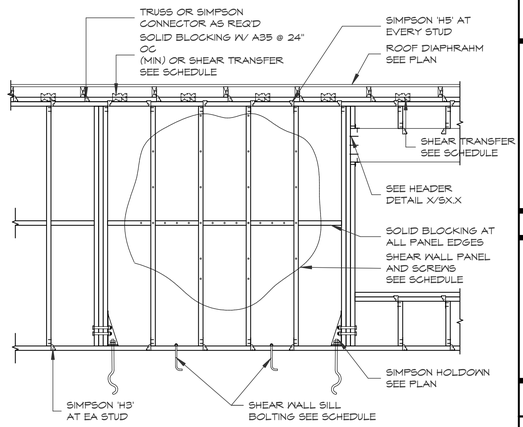

1 SHEAR WALL SECTION
SCALE: NTS

SLI GROUP, INC.
ARCHITECTURE | DESIGN | CONSTRUCTION
15810 PARK TEN PLACE, SUITE 300
HOUSTON, TEXAS 77084
713-465-4650
www.sligroup.com

© COPYRIGHT

National Bank & Trust
National Bank & Trust - Bastrop
264 FM 969 BLDG. 3
BASTROP, TX 78602
Project Number : 8989

ISSUED	DATE
ISSUED FOR CLIENT APPROVAL	
ISSUED FOR BIDDING	
ISSUED FOR PERMIT	09/10/26
ISSUED FOR CONSTRUCTION	11/02/26

REVISIONS

MARK	DESCRIPTION	DATE
A	ADDENDUM A	09/18/26
D	ADDENDUM D	10/21/26

CJG ENGINEERS
STRUCTURAL ENGINNERS
TEXAS ENGINEERING FIRM
NO. F-170
6051 NORTH COURSE DRIVE
SUITE 375
HOUSTON, TEXAS 77072
713.780.3345

The information, ideas, designs, details, layouts, techniques, features, arrangements, plans, sequences, dimensions, allowances, tolerances, conceptions, specifications, intentions, technology or embodiments, as illustrated, arranged, displayed, noted, recorded, indicated, represented, disclosed, evidenced, detailed or otherwise reduced to tangible form hereon, either expressly, inherently or by implication, are the confidential and proprietary information of SLI Design, Inc., and shall not be used for any purpose other than the specific project or undertaking identified on the drawing title block or legend for which they are and have been prepared by SLI Design, Inc. Any other reproduction, disclosure or use of any portion of the confidential and proprietary information of SLI Design, Inc., shall be a breach of the obligation of confidence created by the acceptance of this drawing from SLI Design, Inc. for a specific project or Contract. Any copying, duplicating, reproducing, utilization, alteration, modification, revision or change to this drawing, is expressly prohibited unless done with the prior written consent or approval of SLI Design, Inc., and shall not be undertaken without receipt of such prior written approval. This drawing is loaned by SLI Design, Inc., for the limited purpose of complying with a specific Contract. The drawing remains the property of SLI Design, Inc., and shall be returned upon request or completion of the contract, unless specifically authorized by Contract, under which it was loaned.

PRINT DATE: 11/2/2026 10:01:54 AM

STATE OF TEXAS
BRITT GARDNER
90958
LICENSED PROFESSIONAL ENGINEER
2 November 2026

DRAWING TITLE
FRAMING DETAILS

DRAWN BY	JM	SHEET NO.
CHECKED BY	BG	S402
APPROVED BY		

O:\2020\2026\1067 - National Bank and Trust - Bastrop\01 Revit Models - v2026\National Bank & Trust R26.rvt